

THE USE OF GPR TECHNIQUE TO IDENTIFY OBJECTS OF ANTHROPOGENIC ORIGIN

Results of use of GPR (Geo-Penetrating Radar) method to identify objects of anthropogenic origin are presented. GPR measurements were conducted in areas containing the remains of middle ages buildings. The goal of these measurements was to determine their location and examine the degree of usefulness of GPR method in this type of search.

Key words: GPR method; GPR soundings and profiling.

GPR method belongs to the fastest-developed geophysical techniques used to analyze the near-surface structures. This method is widely used in many applications. Measurements are carried out quickly, but the analysis of results is complex and requires highly specialized operator. Obtained GPR scans allow the precise location of requested objects if the process of data interpretation is conducted properly.

GPR measurements were performed by apparatus Zond 12E dual channel with shielded antenna 500 MHz, where sampling step was 0.03 m, the number of assembly 4, the wave propagation speed 0.15 m/ns and the distance between profiles 1 m. Location of analysed area: the Park Island in Łabiszyn near Bydgoszcz with the remains of the castle, the ward of german guard in Jasinieć Stary and the parking 'Pod Blankami' in Bydgoszcz with the remnants of the gothic building. Obtained time scans (see Figure 1)

allow the location of the underground corridors of the castle (detail 1) and the location of towers (detail 2). The time scan profile (see Fig.2) of the ward of german guard building show the remnants of buildings (detail 1), towers (detail 2) and defensive walls (detail 3). The remnants of gothic buildings located in the parking "Pod Blankami" in Bydgoszcz are shown in the Fig.3.

On the ground of shown examples, GPR profiling is a good tool to identify anthropogenic objects. Analysis of time scans can identify the requested objects and precisely determine their location. Unfortunately, the proper interpretation of time scans requires considerable operator experience and knowledge of procedures of interpretation. For the best results, if it is possible, link this technique with other geophysical method, for instance with electrical tomography method.

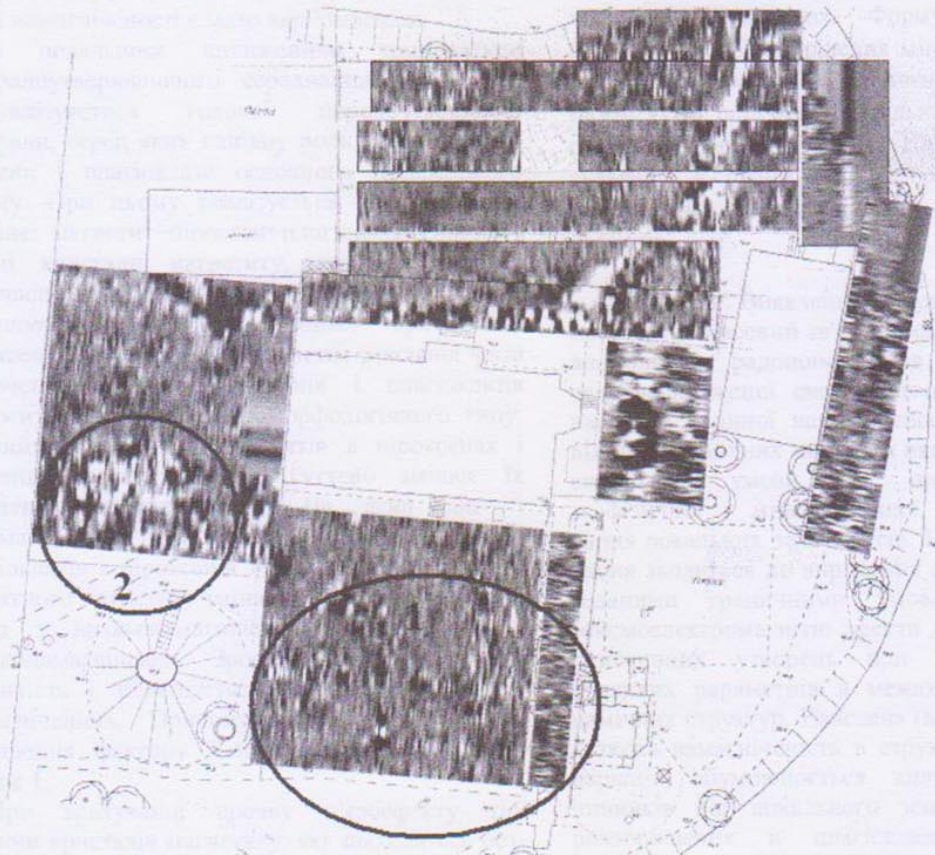


Fig.1. The mosaic of time scans in The Istalnd Park in Łabiszyn

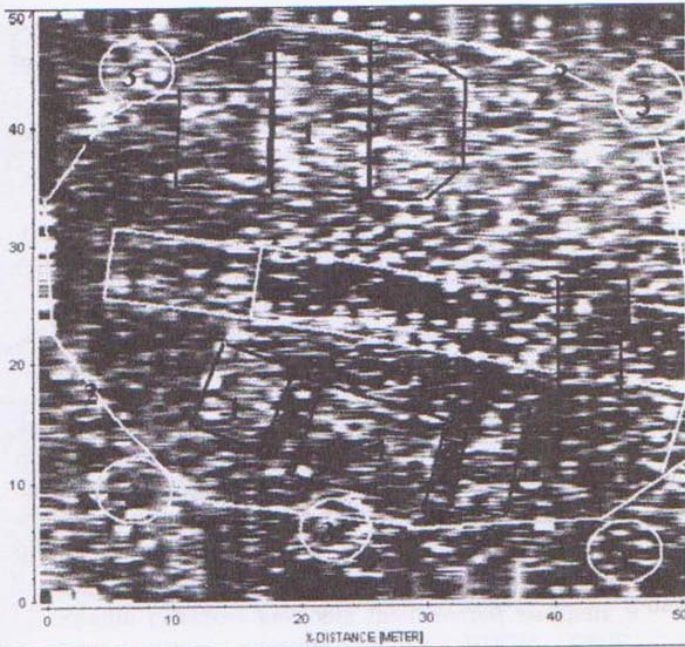


Fig. 2. The remnants of the ward in Jasiniec Stary

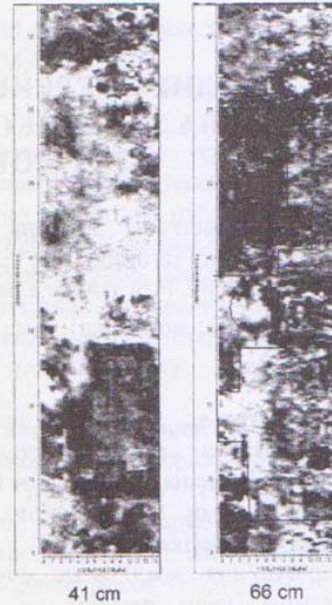


Fig. 3. The remnants of gothic buildings in Bydgoszcz

References

Zohdy A.A.R. Application of surface geophysics to ground-water investigations. // USGS, Book 2, Collection of Environmental Data. USA –1974.

Parasnis D.S. Principles of Applied Geophysics // Chapman&Hall. London UK, 1984.

Matveev, V.K.. Interpretation of electromagnetic sounding. (In Russian.) // Nedra, Moscow. 1974.

ВИКОРИСТАННЯ ГЕОРАДАРА ДЛЯ ІДЕНТИФІКАЦІЇ ОБ'ЄКТІВ АНТРОПОГЕННОГО ПОХОДЖЕННЯ

Е. Томашевска, Д. Каминьска, Я. Луковски

Представлено результати застосування георадарного (GPR) методу для ідентифікації об'єктів антропогенного походження. Виміри проводились на територіях, що містять залишки середньовічних будинків. Метою вимірів було визначення розташування цих залишків та оцінка корисності методу для такого типу пошуків.

Ключові слова: георадарний метод; георадарні зондування та профілювання.

ИСПОЛЬЗОВАНИЕ ГЕОРАДАРА ДЛЯ ИДЕНТИФИКАЦИИ ОБЪЕКТОВ АНТРОПОГЕННОГО ПРОИСХОЖДЕНИЯ

Э. Томашевска, Д. Каминьска, Я. Луковски

Представлено результати застосування георадарного (GPR) методу для ідентифікації об'єктів антропогенного походження. Измерения проводились на территориях с остатками средневековых строений. Целью измерений было определения местонахождения этих остатков и оценка полезности метода для такого типа поисков.

Ключевые слова: георадарный метод; георадарные зондирование и профилирование.

ACKNOWLEDGMENTS

This work was financially supported by the Foundation of Mechatronics Development (Fundacja Rozwoju Mechatroniki) in 2011.

Kazimierz Wielki University in Bydgoszcz, Institute of Mechanics and Applied Computer Science, Poland